


FIG.1

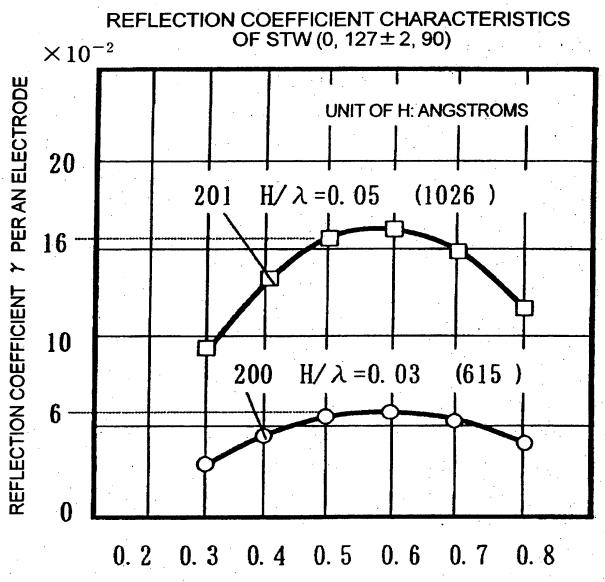

RATIO OF WIDTHS OF ELECTRODE CONDUCTORS $\eta = L/P$

RELATIVE ENVELOPE DISPLACEMENT U(X)

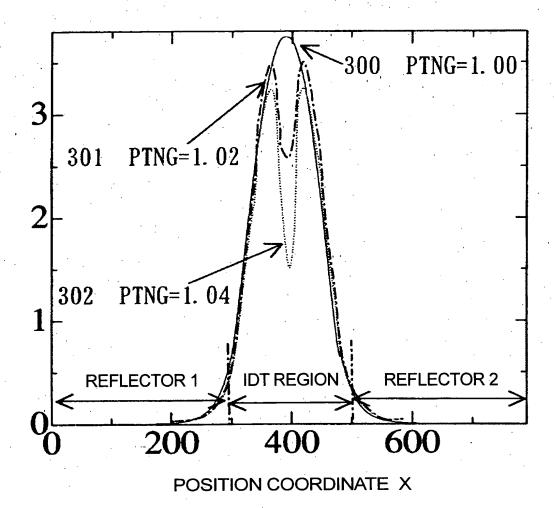


FIG. 3


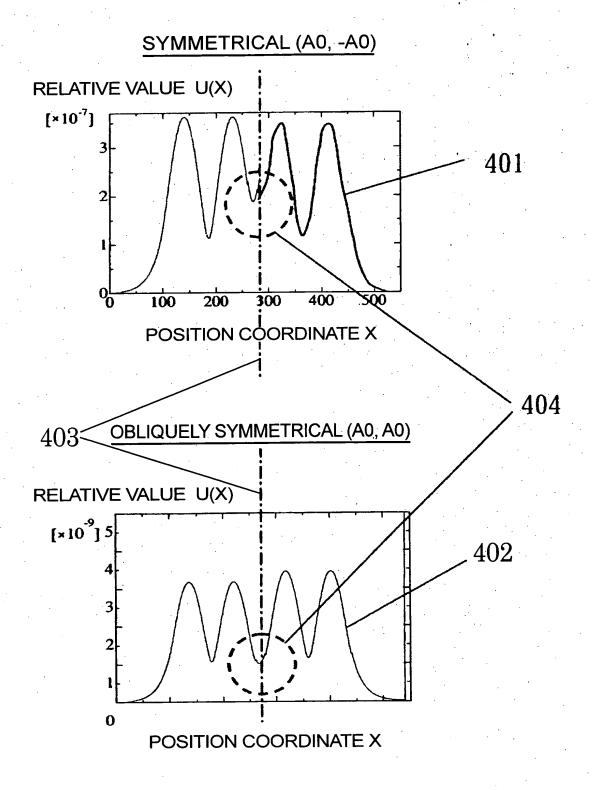


FIG. 4

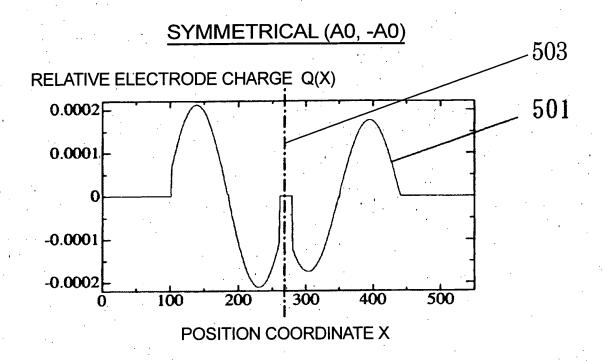

OBLIQUELY SYMMETRICAL (A0, A0)

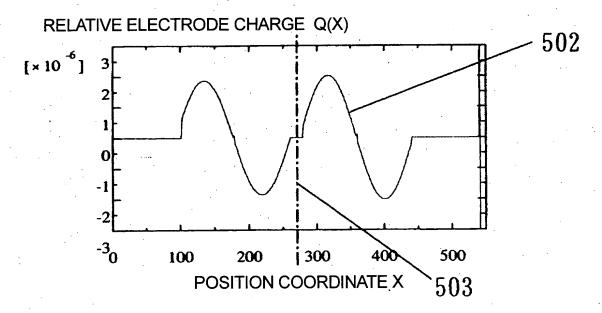


FIG. 5

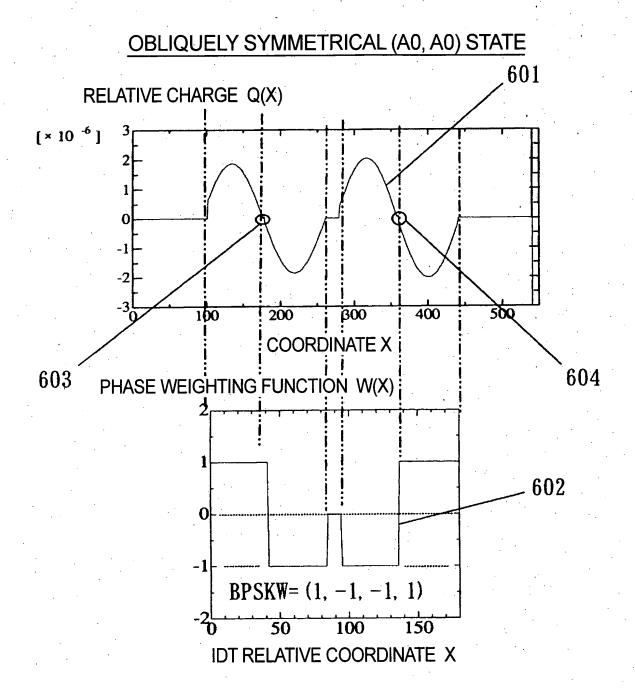


FIG. 6

IN THE CASE OF A0 MODE

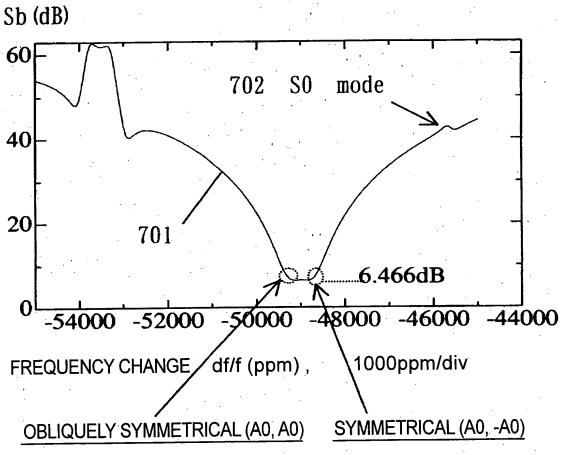


FIG. 7


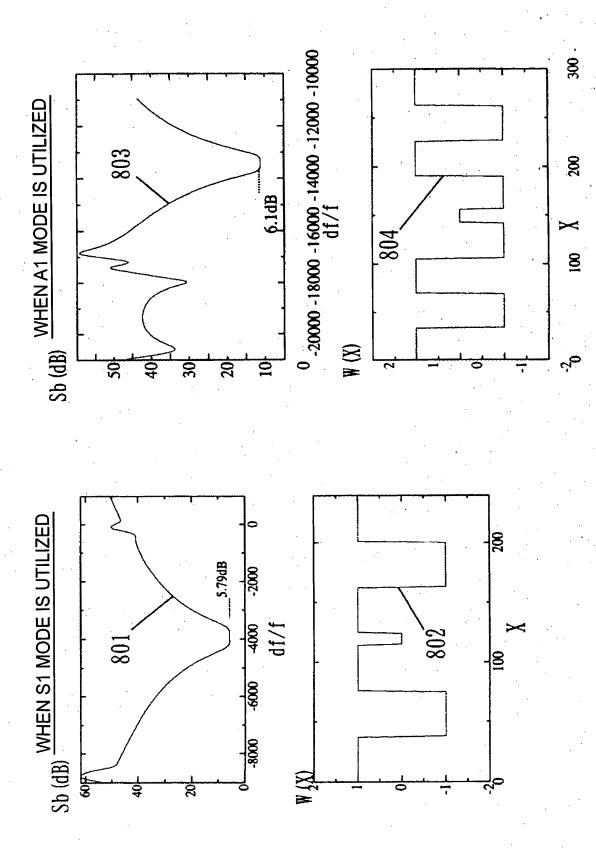


FIG. 8

WHEN SO MODE IS UTILIZED

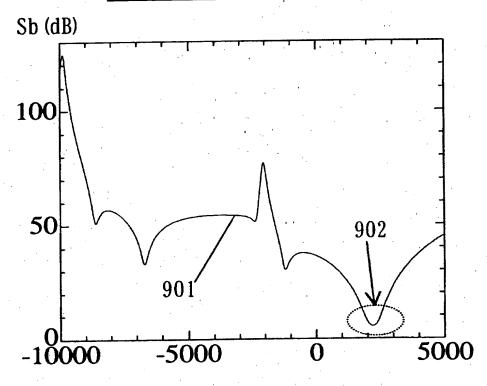

FREQUENCY CHANGE df/f (ppm)

FIG. 9

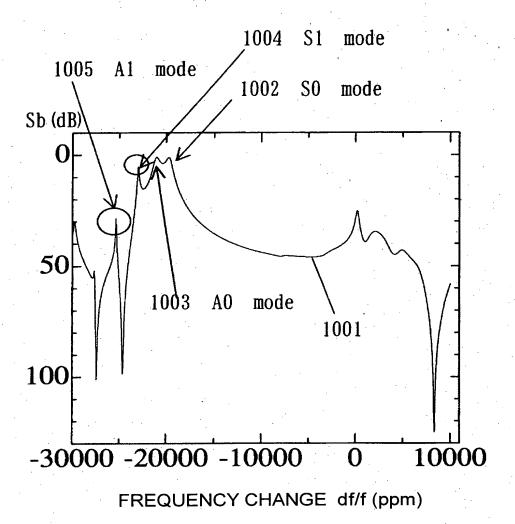


FIG.10

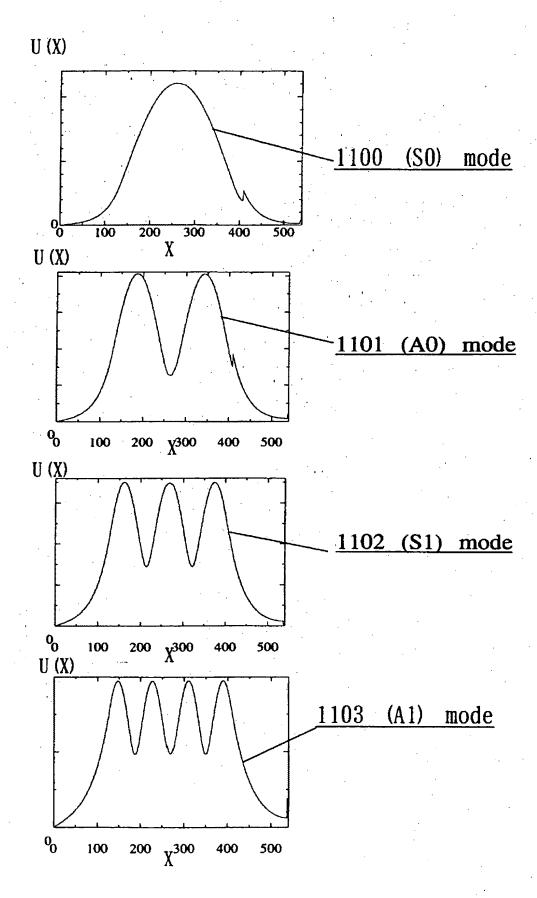


FIG.11

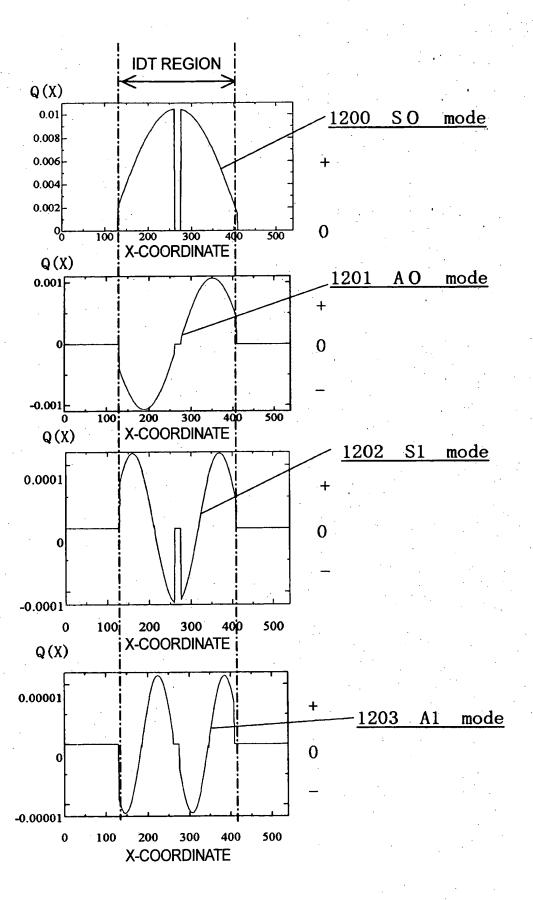


FIG.12

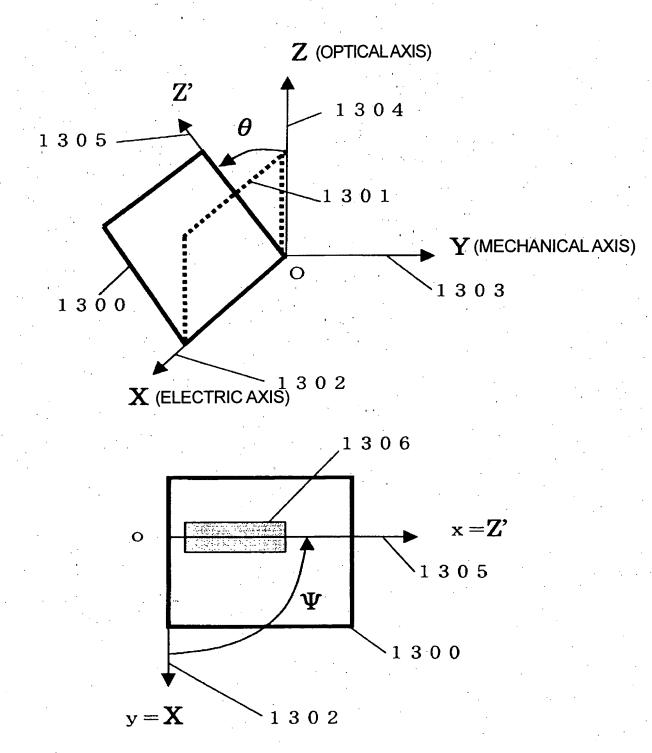


FIG.13

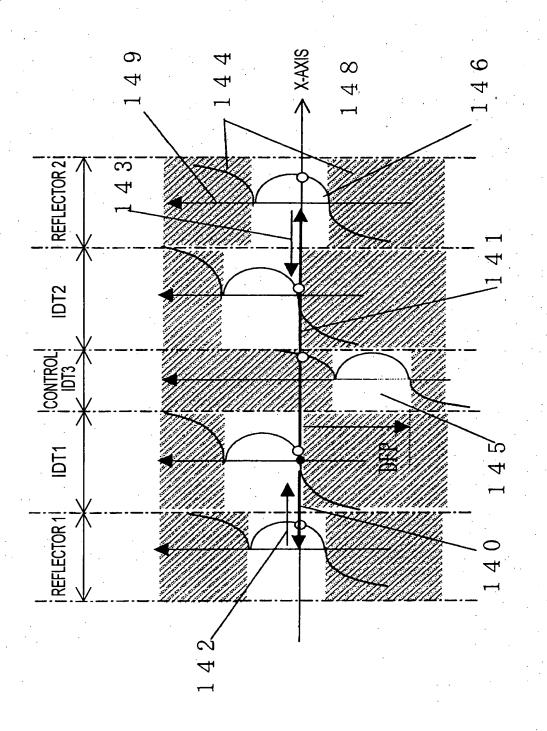


FIG. 14